

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
 CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

Tender Notice No: GSIDC/ENGG. /NIT-139/2021-2022, Dated: 31/03/2020

COMMON SET OF DEVIATIONS (CSD) NO. 1

20th April 2022

SL. NO.	VO L. NO.	PA GE NO.	CHAPTER/ CLAUSE NO./ ITEM NO	CLAUSE IN THE TENDER DOCUMENT/ QUERY	CLAUSE/ SENTENCE TO BE READ AS/ CLARIFICATION
1.	III		BB5	Workspace area & Library Bookshelves - Closed Fabricating, supplying & installing in position Full Height Storage with Lockable, Openable Glass Shutters with enclosed shelving of approved colour & finish as per detailed design; Outer structure & Shelves shall be made up of 19mm thk approved, exterior grade marine plywood (BWP-boiling waterproof). All shelving shall be made up of 19mm thk approved, exterior grade marine plywood (BWP- boiling waterproof) as per detailed design. All plywood surfaces shall be finished with 1mm thick approved wood/ solid finish laminate on all external surfaces & 1mm thick solid colour approved laminate on all internal surfaces as per detailed design & finishes schedule. All external & internal plywood surface edges to have 2mm PVC edge banding to match laminate shade. The shelves shall be adjustable in height. The shutters shall be lockable, made up of 8 mm	Workspace area & Library Bookshelves - Closed Fabricating, supplying & installing in position Full Height Storage with Lockable, Openable Glass Shutters with enclosed shelving of approved colour & finish as per detailed design; Outer structure & Shelves shall be made up of 19mm thk approved, exterior grade marine plywood (BWP-boiling waterproof). All shelving shall be made up of 19mm thk approved, exterior grade marine plywood (BWP- boiling waterproof) as per detailed design. All plywood surfaces shall be finished with 1mm thick approved wood/ solid finish laminate on all external surfaces & 1mm thick solid colour approved laminate on all internal surfaces as per detailed design & finishes schedule. All external & internal plywood surface edges to have 2mm PVC edge banding to match laminate shade. The shelves shall be adjustable in height. The shutters shall be lockable,

BIDDER

EMPLOYER

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

			<p>clear glass with prelaminated particle board side trims, with S.S. 304, satin matt finish handles. Grooves, if any, in laminate surfaces shall be as per detailed dwg. Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings. Anti-termite/anti-borer treatment shall be applied on all plywood, before fabrication of furniture. All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware as per finishes schedule (S.S. 304 handles, S.S. 304 hinges, magnetic catch, locks, floor levellers, etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Architect/ Engineer-In-Charge. Refer Dwg no. GAP-ID-TD-105 Overall size : 900MM (W) x 450MM (D) x 2100MM (H)</p>	<p>made up of 8 mm clear glass with 19mm thk approved, exterior grade marine plywood side trims, with S.S. 304, satin matt finish handles. Grooves, if any, in laminate surfaces shall be as per detailed dwg. Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings. Anti-termite/anti-borer treatment shall be applied on all plywood, before fabrication of furniture. All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware as per finishes schedule (S.S. 304 handles, S.S. 304 hinges, magnetic catch, locks, floor levellers, etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Architect/ Engineer-In-Charge. Refer Dwg no. GAP-ID-TD-105 Overall size : 900MM (W) x 450MM (D) x 2100MM (H)</p>
--	--	--	---	--

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

2.	III		AA1	<p>Workstation Desk - 1350MM x 600MM X 750(H)</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30 mm thick metal partition system. The frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (450 mm height above table) shall be finished with softboard with fabric.The Side Partition Screen (450 mm height above table) shall be made up of 5 mm thick frosted glass. Below table top, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per</p>	<p>Workstation Desk - 1350MM x 600MM X 750(H)</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30mm to 50 mm thick metal partition system. The frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (450 mm height above table) shall have softboard with fabric finish. The Side Partition Screen (450 mm high above table, with 5 mm thick frosted glass infill/ fixed using clipping system, 750mm below table top with prelaminated board infill). Below tabletop, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable</p>
----	-----	--	-----	---	--

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

			<p>detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware (Aluminium flip open switchboard cover, magnets, floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.</p>	<p>mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware (Aluminium flip open switchboard cover, magnets, floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.</p>
3.	III	AA2	<p>Workstation Desk - 1200MM x 600MM X 750(H)</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30 mm thick metal partition system. The</p>	<p>Workstation Desk - 1200MM x 600MM X 750(H)</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30mm to 50 mm thick</p>

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

			<p>frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (450 mm height above table) shall be finished with softboard with fabric. The Side Partition Screen (450 mm height above table) shall be made up of 5 mm thick frosted glass. Below table top, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware</p>	<p>metal partition system. The frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (450 mm height above table) shall have softboard with fabric finish. The Side Partition Screen (450 mm high above table, with 5 mm thick frosted glass infill/ fixed using clipping system, 750mm below table top with prelaminated board infill). Below table top, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be</p>
--	--	--	--	---

BIDDER

EMPLOYER

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

				(Aluminium flip open switchboard cover, magnets, floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.	inclusive of all labour, materials, tools, hardware (Aluminium flip open switchboard cover, magnets, floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.
4.	III		AA3	<p>Workstation Desk - 1200MM x 600MM X 750(H), Front screen - 150MM</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30 mm thick metal partition system. The frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (150 mm height above table) shall be finished with softboard with fabric.The Side Partition Screen (450 mm height above table) shall be made up of 5 mm thick frosted glass. Below table</p>	<p>Workstation Desk - 1200MM x 600MM X 750(H), Front screen - 150MM</p> <p>Supplying & installing in position Workstation Desks of approved make, colour & finish as per detailed design; Table top shall be made up of 25 mm thick prelaminated particle board of approved shade. Main partition shall be made up of min.50 mm thick metal frame partition system. Intermediate, Return & End partition shall be made up of 30 mm to 50mm thick metal partition system. The frames shall be fabricated in 1.2mm CRCA sheet. Frames are shall be powder coated as per approved shade. The Front Partition Screen (150 mm height above table) shall have softboard with fabric finish. The Side Partition Screen (450 mm high above table, with 5 mm thick frosted glass infill/ fixed using</p>

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

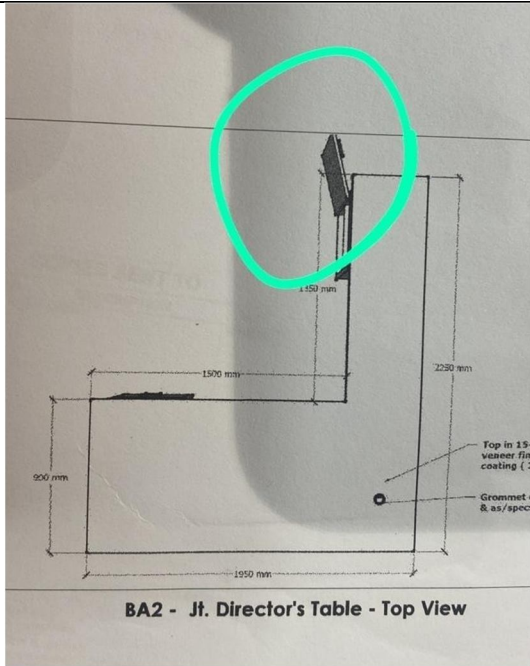
			<p>top, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware (Aluminium flip open switchboard cover, magnets, floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading</p>	<p>clipping system, 750mm below table top with prelaminated board infill). Below table top, all frames shall have an infill of 6mm thick prelaminated particle board on either side of the frame. All prelaminated particle boards shall be interior grade conforming to IS:12823 with exposed edges finished in machine pressed 2 mm thick PVC edge banding/ lipping & sealed edges finished in machine pressed 0.8 mm thick PVC edge banding/ lipping. Wire routing/ wire management with grommet shall be provided on main table as necessary. Including pullout metal keyboard tray under desktop, with 200mm min. extension, with retractable mouse pad tray, with height adjustable mounting brackets, with powder coated finish in black.</p> <p>Grooves, if any, in laminate surfaces shall be as per detailed dwg.</p> <p>Necessary cut-outs for electrical switchboards/cables shall be made as required, as per site conditions & other relevant drawings.</p> <p>All materials shall be of approved makes. Rate shall be inclusive of all labour, materials, tools, hardware (Aluminium flip open switchboard cover, magnets,</p>
--	--	--	--	--

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

				pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.	floor levellers, cable manager, locks etc) & other necessary hardware such as screws, adhesives, lipping/beading pattis, anti-termite treatment, cutouts, rounding of sharp edges etc complete as per detailed drawings/ images, technical specifications & approval & direction of the Engineer-In-Charge.
5.	III		SECTION C	Approved makes for Section C – Allied Works / Miscellaneous	Shall be of reputed make as approved by the engineer in charge

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

6.	IV			 <p align="center">BA2 - Jt. Director's Table - Top View</p>	Marked area is shutter for the cabinet below table.
7.	III		Section D – Special Items	<p>WRT to the above mentioned tender, we would like a clarification and further details for the BOQ item Serial No. D- Sedction D- Special items.</p> <p>Item mention is MURAL-PAINTS, for which a design reference would be required to be able to understand the scope of work and the materials involved to make an informed quote for the same</p>	<p>The scope of the work & materials to be used shall be as defined in Volume III of the Tender documents.</p> <p>In addition to the above please refer the reference images are enclosed herewith under Annexure A. For clarity these images are provided only for the purpose of understanding of the broad nature & character of the murals. The actual design & detailing of the mural shall</p>

GOA STATE INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED
CONSTRUCTION OF OFFICE BUILDING FOR DIRECTORATE OF ACCOUNTS AT PORVORIM, GOA - INTERIOR AND OTHER MISCELLANEOUS WORKS

					vary as compared to the above reference images & shall be provided during execution of the works.
--	--	--	--	--	---